FILE NO.	FOT225,FOT227
PART NO.	-

REVISIONS				
REV.	DESCRIPTION	DATE	ECO No.	APPVD
A	RELEASE TO PRODUCT	2010/11/05		CHANG

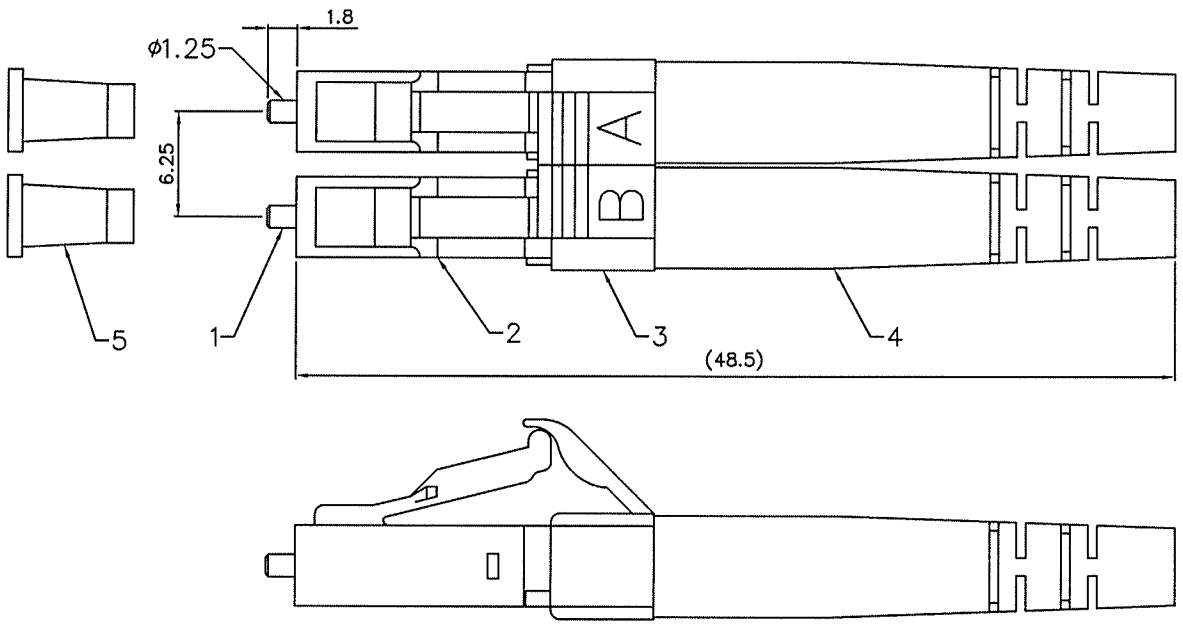

NOTE:
1. LC CONNECTOR COMPLY WITH IEC/PAS 61754-20
   LC TYPE FIBER OPTICAL CONNECTOR STANDARD.
2. FERRULE I.D. : 125um.(S.M.) 127um.(M.M.)
3. OPTICAL CHARACTERISTICS:
   INSERTION LOSS: ≦0.3dB(S.M.) ≦0.5dB(M.M.)
   RETURN LOSS: ≧45dB (PC POLISHING)
   ≧50dB (SPC POLISHING)
   ≧55dB (UPC POLISHING)
   * FOR S.M. ONLY
4. OPERATING TEMPERATURE: -20°C ~ +70°C
   STORAGE TEMPERATURE: -40°C ~ +80°C
   HUMIDUTY (NON-CONDENSING) 95% R.H.
5. ALL MATERIAL COMPLIANT WITH RoHS.
6. BLACK BOX P/N:
   S.M.: FOT225
   M.M.: FOT227

NO.	PART NAME	QTY	MATERIAL	PROCESSING
5	DUST	2	PP	----------
4	BOOT	2	PP+TPR, 94V-0	----------
3	DOUBLE JUMPER PLUG CLIP	1	NYLON66	----------
2	HOUSING	2	PEI, 94V-0	----------
1	FERRULE	2	ZIRCONIA	----------

			SIGNATURE	DATE
MATERIAL				
QUANTITY		DRAWN	LU	2010/11/05
		PROJECT ENGINEER	LU	2010/11/05
		CHECKED	LIU	2010/11/05
		APPROVED	CHANG	2010/11/05
		DRAWING MANAGER	CHUNG	2010/11/05

Another quality product from BLACK BOX NETWORK SERVICES

DWG. NAME: DUPLEX LC CONNECTOR φ3.0mm (S.M. & M.M. ONE PIECE TYPE)

SIZE C | DWG. NO. FOT225,FOT227 | REV. A

SCALE : N:A | DATE : 2010/11/05 | SHEET 1 OF 1